
! WARNING !

H2O Audio stands behind our products.
Failure to follow our instructions could destroy your iPod and will void the Warranty. If you have any concerns, or experience any difficulties with your H2O Audio product, we are here to help you, so please contact us directly. We can be reached at:

1.800.708.6080

support@h2oaudio.com

www.h2oaudio.com

Important Information About Your T-Seal

The most important feature of your new H2O Audio housing is the removable T-Seal that forms a waterproof barrier between the base and lid of the housing. It is up to you to check that the seal has not slipped or become out of alignment every time you install your iPod in the housing.

H2O Audio stands behind the products we sell, but they will only work if you use them correctly. By following these instructions we know you will enjoy your iPod in the water like we do.

H2O Audio:
1.800.708.6080
858.623.0339
support@h2oaudio.com
www.h2oaudio.com

****Please remember REMOVE this paper
before using****

59 - 73 20070423



Caution

Failure to use this product
correctly voids your Warranty
and could destroy your iPod
READ ALL INSTRUCTIONS

Correct


The dotted lines in the photos below indicate where the contact surface for the T-Seal is located



T-Seal must be installed completely in all four corners of the housing.

This T-seal is correctly seated in a closed housing, sealing the housing and protecting the iPod from water.

Incorrect

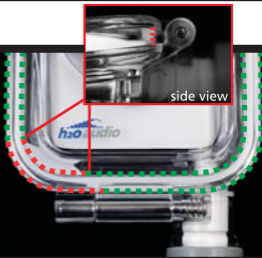

This T-Seal is shown out of alignment and will not protect the iPod from water when closed.

The misaligned T-Seal becomes pinched between the base and lid (as shown) creating an opening in the housing that will cause the housing to flood.

Removable T-Seal Instructions

The most important feature of your H2O Audio Waterproof Housing is the removable T-Seal.

The removable T-Seal is the main barrier between the harmful water and your iPod.

It is extremely important that special attention is paid to ensure the T-Seal is seating completely in all four corners and the Housings Contact Surface. If the T-Seal is dirty, out of alignment, twisted or pinched in any way it will compromise the integrity of the housing and should not be used.

H2O Audio has provided an extra T-Seal (included) in the event of annually replacement, accidental damage, loss, overexposure to direct sunlight, or if the T-Seal has become misshaped though misuse.

How to install / replace the T-Seal

1. Unlatch and open case.
2. Starting at any corner, gently remove the T-Seal. (Do not stretch or pull on T-Seal)



3. To install a new or clean T-Seal, start at any corner, push the T-Seal into the corner and run your finger along the T-Seal pushing it into the Housing Contact Surface.



4. Ensure the T-Seal is seated properly in all four corners and the Housing Contact Surface.

How to install / replace the T-Seal

5. Gently close lid and lock latch. The lid should close without any resistance. If you experience any resistance when closing the housing please call customer service immediately at **1.800.708.6080 x213** before using your housing.



6. Visually inspect the outside of the housing and ensure the T-seal is installed correctly. If the T-Seal is dirty, out of alignment, twisted or pinched in any way it will compromise the integrity of the housing and should not be used.



✔ **Correct**

This T-seal is correctly seated in a closed housing, sealing the housing and protecting the iPod from water.



✘ **Incorrect**

The misaligned T-Seal becomes pinched between the base and lid (as shown) creating an opening in the housing that will cause the housing to flood.

Cleaning & Storing the T-Seal

It is extremely important that you keep the T-Seal clean & free of sand, dirt, hair, lint, and other debris.

To clean the T-Seal remove it from the housing.

Wash T-Seal in warm fresh water, ensuring all debris is cleaned from the T-Seal.

Strong detergents, soaps, and chemicals MUST NEVER be used to clean the Housing or the T-Seal.

Allow T-Seal to air dry. Once dry install back into the housing. Please refer to the "How to install / replace your T-Seal" on how to properly install the T-Seal.

For long term storage, store in a plastic bag out of direct sunlight.



h2o audio


H2O Audio for iPod nano (2nd Gen)*

Printed Instructions
h2oaudio.com

*If you have a 1st Gen iPod nano please check out the H2O Audio for iPod nano (1st Gen) S6-1A3

Before using this system, please be sure to read, understand, and follow the instruction of this manual.

2. Housing Features

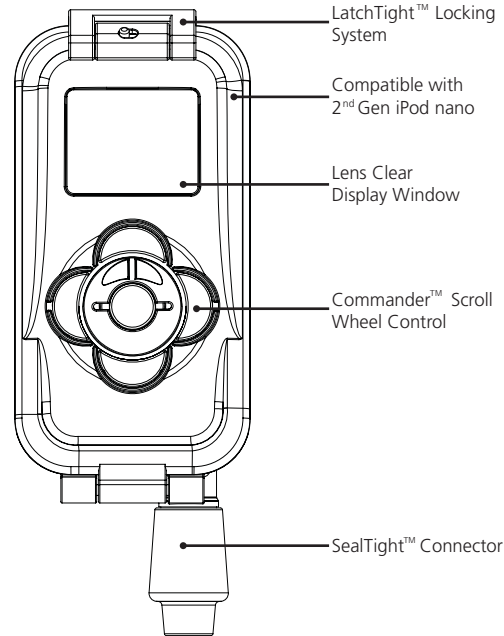

IMPORTANT: Make sure the seal is fully seated against the housing base each time you close the housing. Use the lid to compress the seal into the base if required.

3. Introduction

The H2O Audio waterproof housing lets you to listen to digital audio during active watersports. It houses the Apple iPod nano (2nd Gen) digital media player.

HOUSING: The housing features the LatchTight™ Locking System which keeps the unit waterproof during operation. The H2O Audio housing allows™ for functional control of the player while in the water with the Commander™ Scroll Wheel.

NOTE: The iPod is NOT waterproof without the H2O Audio housing and headphones and is NOT covered under the product warranty. Any attempt to use the housing with an audio player other than the Apple iPod nano (2nd Gen) will void the Warranty.

HEADPHONES: The housing is only waterproof when combined with H2O Audio waterproof headphones (sold separately). Use of other headphones with a 3.5mm stereo connector will result in a water resistant case, and should not be submerged.


4. Leak Test

Before utilizing the system for the first time, it is highly recommended to perform a 'Leak Test'. Follow the instructions below. **DO NOT INSTALL THE iPod nano (2nd Gen) INSIDE THE HOUSING FOR THE LEAK TEST**


1. Open the housing, and visually inspect the housing T-Seal.
2. Verify the T-Seal is fully seated and free of debris, then close and lock the housing using the latch.
3. Immerse the housing, without the iPod, in water and soak for 30 minutes.
4. Manipulate the controls during submersion.
5. Remove from the water, dry the exterior, and visually inspect the housing for any sign of leaks before opening.
6. Open the housing upside down to prevent water from dropping into the housing during opening.
7. After a successful 'Leak Test', install the iPod in the housing.

5. Unlock / Locking the Housing


Unlocking your housing



1. Slide latch button towards the unlock icon.




2. While holding the latch button towards the unlock icon, push up on the side of the latch.




3. Unhook the buckle from the base.


Locking your housing



1. Close the lid, and hook the buckle under the base.




2. Pull the latch towards the housing and snap in place.



3. Verify the lid and latch are closed and the button is positioned on the lock icon prior to entering the water.

6. The T-Seal

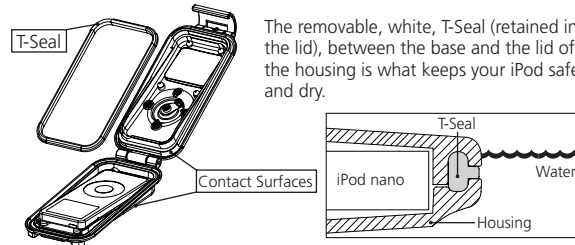

The removable, white, T-Seal (retained in the lid), between the base and the lid of the housing is what keeps your iPod safe and dry.

IT IS EXTREMELY IMPORTANT YOU ENSURE THE T-SEAL IS PROPERLY SEATED DURING EACH CLOSURE. If it is out of alignment, or twisted you will cause damage to or destroy your iPod.

Prior to use, verify:

1. T-Seal is aligned properly in the Contact Surface of the lid prior to closure.
2. T-Seal and contact surface have been cleaned as necessary using a soft, lint-free cloth.
3. T-Seal and Contact Surface are free of scratches and other imperfections.

Do NOT use if:

1. T-Seal is twisted, or out of alignment during closure.
2. T-Seal and Contact Surfaces have any dirt, lint, hair, and/or other debris.
3. You see scratches or imperfections on the T-Seal or Contact Surfaces.

DO NOT USE SILICONE GREASE as this will damage the seal.

To ensure the T-Seal is fully seated in the base of the housing, firmly squeeze both sides (the base and lid) of the housing together after each insertion of the player. Always check to make sure the latch is closed and locked prior to use.


If you have any questions or doubts, please contact H2O Audio Customer Support

7. Installing the iPod into the Housing

Installing the iPod



1. Align the audio port with the stereo jack in the housing. **IMPORTANT:** Remove any skins or covers from your iPod before installing it into the housing.




2. Gently snap the player into the audio jack. Verify the player is completely plugged into the audio jack.

Compatible with 2nd Gen iPod nano

Removing the iPod


1. Slide the player off of the stereo jack. Now the player can slide straight out of the housing.

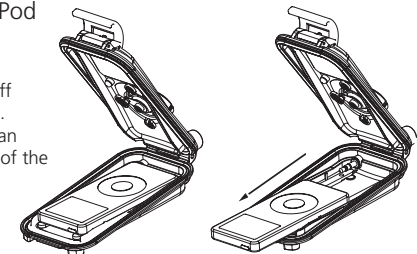


NOTE: Do not disturb the T-Seal during removal of the player. If the T-Seal is moved, Please use the housing lid to completely seat the T-Seal.

8. Connecting the Headphones

The SealTight™ Connector is what keeps your audio connection safe and dry underwater. It is designed specifically to create a seal around the H2O Audio Series Waterproof Headphones (sold separately). Using any other headphones will not have a complete waterproof connection, and reduces the waterproof rating to water-resistant.

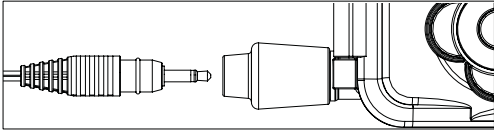

1. To create a waterproof connection, align the 3.5mm stereo plug on the headphones with the stereo jack of the housing.

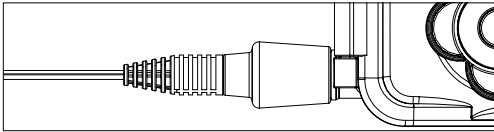


2. Insert the headphones into the stereo jack of the housing, ensuring that the plug mates securely into the SealTight Connector.

CAUTION: The SV Series Headphones do not fit with the SealTight™ Connector boot featured on the H2O Audio Series housings. If your headphones have a connector that looks like the one shown below, you can not use them with this housing.




11. Available Accessories



H2O Audio Waterproof Headphones (required for use underwater)



Pro Armband for extreme sports



Swimbelt designed by swimmers


12. Contact Us

Customer Support is available Monday to Friday 9AM to 5PM PST.
www.h2oaudio.com
P. 800.708.6080 or 858.623.0339
F. 858.225.0815
E. support@h2oaudio.com

Copyright Notice:
This owner's manual is copyrighted, all rights reserved. It may not, in whole or in part, be copied, photocopied, reproduced, translated, or formed into any electronic format without prior consent in writing. H2O Audio is a registered trademark of Diver Entertainment Systems, Inc. Apple and iPod are registered trademarks of Apple Computer Inc. Patents 6396769, 6614722, 6954405 Others Pending.

9. Commander™ Scroll Wheel Control

The Commander™ Scroll Wheel Control is a waterproof assembly, which allows you to maintain complete control over the iPod's Click wheel functions. Refer to iPod Instruction Manual for complete details of how to use the player.

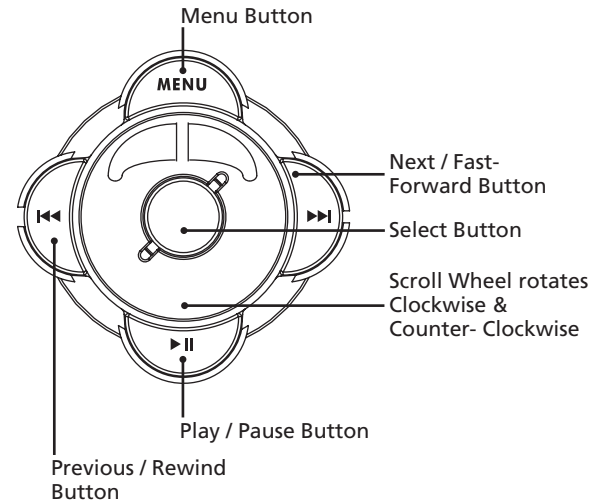

10. General Storage Procedures

For long-term storage, store in a plastic bag out of direct sunlight.

CAUTION: The life of a T-Seal is typically one (1) year. Contact H2O Audio for spare T-Seals or a maintenance kit. Always remember to reinstall the T-Seal before next use. Do not expose the housing to extreme heat, such as the inside of a hot car, or in hot direct sunlight, such as on a beach, or boat deck. Doing so may cause damage and subsequent flooding.

CAUTION: The housing is susceptible to internal condensation with extreme temperature fluctuations. Use above 105°F(40C) can result in internal condensation. When used in temperatures below freezing, frost will appear on the interior of the housing.

CAUTION: Do not store housing in the following environments:

- * Solvents or other chemical fumes
- * High humidity
- * High Ozone
- * Extreme temperature fluctuations

Storing the housing in these conditions may lead to a damaged housing, causing it to leak.

Rinse the EXTERIOR of the system in fresh water after EACH use:

1. Make sure the housing is securely closed with headphones attached.
2. Soak in clean fresh water for 30 minutes.
3. Rinse the entire system with freshwater
4. Completely dry the entire exterior of the system using a clean soft cloth.
5. Dry face down so water can properly drain from the Commander™ Scroll Wheel.

Strong detergents, soaps, and chemicals MUST NEVER be used to clean the system.

13. General Use Notice

READ THIS MANUAL CAREFULLY. IF YOU HAVE ANY QUESTIONS PLEASE CONTACT H2O AUDIO CUSTOMER SUPPORT PRIOR TO USE.

IMPROPER USE OF THIS SYSTEM MAY CAUSE THE USER TO MAKE MISTAKES OR DECISIONS THAT MAY LEAD TO SERIOUS INJURY OR DEATH.

IMPORTANT WARNING AND DISCLOSURE:

THOSE USERS THAT ELECT TO UTILIZE THIS SYSTEM AT, OR NEAR, THE WATER'S SURFACE, MUST MAINTAIN SAFETY AWARENESS OF MOVING WATER CRAFTS.

ALWAYS MAKE SURE TO HAVE THE AUDIO PLAYER VOLUME TURNED TO ZERO AND THE SPEAKERS AWAY FROM THE EARS WHEN TURNING ON THE H2O AUDIO UNIT. IF THE VOLUME LEVEL IS NOT ZERO WHEN THE H2O AUDIO IS TURNED ON, IT MAY CAUSE EAR INJURY DUE TO A SUDDEN BURST OF VOLUME. THE VOLUME SHOULD BE SLOWLY INCREASED WITH AN AUDIO FILE PLAYING TO SET THE SPEAKER VOLUME TO COMFORTABLE OUTPUT LEVELS PRIOR TO POSITIONING THE SPEAKERS NEXT TO THE EARS.

IT CAN BE POTENTIALLY DANGEROUS TO PLAY YOUR HEADSETS WHILE ENGAGING IN ACTIVITIES THAT REQUIRE YOUR FULL ATTENTION. YOU SHOULD EXERCISE EXTREME CAUTION OR DISCONTINUE USE IN POTENTIALLY HAZARDOUS SITUATIONS. DO NOT USE THE HEADPHONES WHILE DRIVING, CYCLING, OR OPERATING ANY MOTORIZED VEHICLE. IT MAY CREATE A TRAFFIC HAZARD AND IS ILLEGAL IN SOME AREAS.

AVOID USING HEADPHONES AT HIGH VOLUME. HEARING EXPERTS ADVISE AGAINST CONTINUOUSLY LOUD AND EXTENDED PLAY. IF YOU EXPERIENCE RINGING IN YOUR EARS, REDUCE VOLUME OR DISCONTINUE USE.

THE MANUFACTURER DOES NOT WARRANT AND WILL NOT BE HELD RESPONSIBLE IN ANY WAY FOR DAMAGES TO THE iPod, OR LOSS OF DATA, INCLUDING LOSS OF DATA STORED IN THE iPod, RESULTING FROM AN EXCESSIVE IMPACT, THUNDER, OR AN EORED ON YOUR DEVICE.

14. Warranty Coverage

H2O Audio guarantees, to the original purchaser only, that the equipment purchased (EXCLUDING THE iPod) is free of defects in material and/or under normal recreational use for a period of one year (1) from date of consumer purchase from an Authorized Dealer; provided that proper care and maintenance have been performed as prescribed by the owner's guide included with the equipment. Should this product prove to be defective for any reason (other than those listed as limitations below) the product will be serviced or replaced at H2O Audio's sole discretion at no charge (excluding shipping and handling). This warranty shall be void if the registration is not completed and sent to H2O Audio Customer Services within 30 days of purchase. This warranty shall be void if the equipment has been tampered with by anyone not authorized to perform service. The warranty is non-transferable and extends to the original purchaser only and is valid only if the equipment was purchased from an authorized dealer. Warranty does not extend to cover damage from accident, abuse, tampering, lack of maintenance, theft, or loss. Service or modifications by anyone other than an Authorized H2O Audio agent will void the warranty. H2O Audio will not be responsible for recovery or replacement of the product in the event of loss or theft. H2O Audio, its Authorized International Distributors, and Authorized Dealers make no other warranties, either express or implied or orally, or in writing, with respect to any other warranty coverage except those expressly stated within the preceding sentences. H2O Audio will not be held responsible for any agreements orally or in writing with the exception of those expressly included in this warranty statement. The warranty registration card and the terms contained herein supersede all statements contained in any and all owner's guides, instruction cards, or other equipment literature or catalogs. In no event will H2O Audio, its Authorized International Distributors, and Authorized Dealers be held responsible or liable for any personal injuries resulting from the use of the covered equipment, or for any other damages, whether direct, indirect, incidental, or consequential; even if H2O Audio has been advised of such damages. Warranty does not extend to any damages that may occur to the iPod or loss of any data.

15. Returns

Prior to any return, a Return Authorization (RA) number must be obtained. To receive an RA number, go online to www.h2oaudio.com/returns.php and follow the simple instructions on how to return a product. Proof of purchase from an Authorized Dealer will be required. A copy of the original sales receipt and a copy of the owner's portion of the warranty card must accompany all correspondence regarding the equipment covered by this warranty agreement or in direct reference to this warranty.